

22" Depth, 10" High	MODEL
<ul style="list-style-type: none"> <li>750± CFM</li> <li>7" Round Duct</li> <li>Mesh Filters</li> </ul>	1930PS-10-SS 1936PS-10-SS 1942PS-10-SS 1948PS-10-SS
<ul style="list-style-type: none"> <li>900± CFM</li> <li>8" Round Transition</li> <li>Mesh Filters</li> </ul>	1930PS-10-8-SS 1936PS-10-8-SS 1942PS-10-8-SS 1948PS-10-8-SS
<ul style="list-style-type: none"> <li>635± CFM</li> <li>7" Round Duct</li> <li>Baffle Filters</li> </ul>	1930PSB-10-SS 1936PSB-10-SS 1942PSB-10-SS 1948PSB-10-SS
<ul style="list-style-type: none"> <li>765± CFM</li> <li>8" Round Transition</li> <li>Baffle Filters</li> </ul>	1930PSB-10-8-SS 1936PSB-10-8-SS 1942PSB-10-8-SS 1948PSB-10-8-SS



### FEATURES:

- 304 Marine Grade Stainless Steel.
- Variable Controls.
- Sones: 1.5 to 4.6
- Filters: Aluminum Mesh or Stainless Steel Baffles
- Lighting Mesh Filters: Center Panel LED Bulbs Included.
- Lighting Baffle Filters: Front Panel LED Bulbs Included.
- Heat Controlled Thermostat, Fire Safety Controlled. Activates at 130 degrees. (Not available on 1900T-10 model)
- Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- Suggested Distance Code: 36" above cooking surface.

### OPTIONS:

- Duct covers made to your specifications  
Provide Width and Height  
Brackets will be installed to allow unit to be wall mounted.
- Black or White Powder Coat, additional charge.  
Ex: 1930PS-10-WH (White)
- Matte Black, additional charge.  
Ex: 1930PS-10-MB (Matte Black)
- Remote wiring, see accessories.

NO Performance Warranty over BBQ Grills/Griddle.  
NO Returns on Matte or RAL colors.

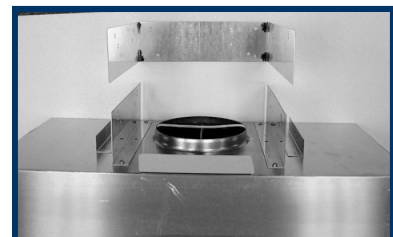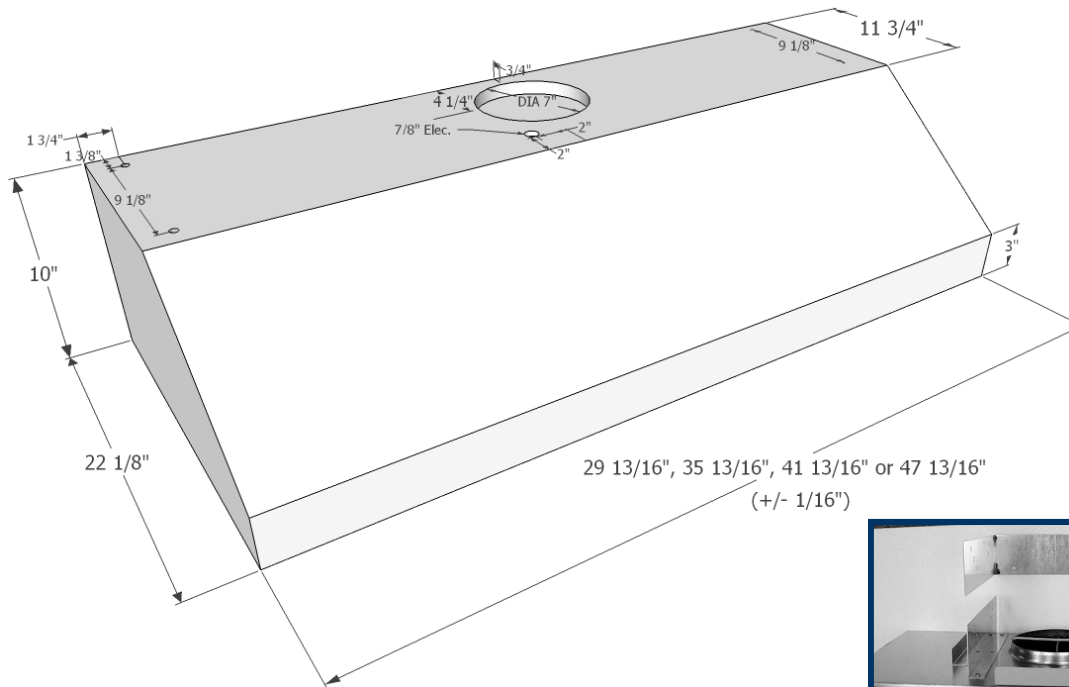

**NOTE:** Mounting Brackets for Wall Mount Application.  
**MUST** indicate wall mount at the time of order.  
Bracket 11" W x 3" H



SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.