

22-1/8" Depth, 10" High	MODEL
<ul style="list-style-type: none"> <li>◆ 635± CFM</li> <li>◆ 7" Round Duct</li> </ul>	C2030PSB-SS C2036PSB-SS C2042PSB-SS C2048PSB-SS
<ul style="list-style-type: none"> <li>◆ 765± CFM</li> <li>◆ 8" Round Transition</li> </ul>	C2030PSB-8-SS C2036PSB-8-SS C2042PSB-8-SS C2048PSB-8-SS
<ul style="list-style-type: none"> <li>◆ 850± CFM</li> <li>◆ 10" Round Transition</li> </ul>	C2030PSB-K-SS C2036PSB-K-SS C2042PSB-K-SS C2048PSB-K-SS
<ul style="list-style-type: none"> <li>◆ 1080± CFM</li> <li>◆ Two 7" Round Ducts</li> </ul>	C2036PS1-TWB-SS C2042PS1-TWB-SS C2048PS1-TWB-SS C2054PS1-TWB-SS C2060PS1-TWB-SS
<ul style="list-style-type: none"> <li>◆ 1290± CFM .</li> <li>◆ Two 8" Round Transitions</li> </ul>	C2036PS1-TWB-8-SS C2042PS1-TWB-8-SS C2048PS1-TWB-8-SS C2054PS1-TWB-8-SS C2060PS1-TWB-8-SS
18-1/8" Depth, 10" High	MODEL
<ul style="list-style-type: none"> <li>◆ 540± CFM</li> <li>◆ 7" Round Duct, 4.25" Off Center</li> </ul>	C2030BP1B-SS C2036BP1B-SS C2042BP1B-SS
<ul style="list-style-type: none"> <li>◆ 625± CFM</li> <li>◆ 7" Round Duct</li> </ul>	C2030BPB-SS C2036BPB-SS C2042BPB-SS C2048BPB-SS
<ul style="list-style-type: none"> <li>◆ 750± CFM</li> <li>◆ 8" Round Transition</li> </ul>	C2030BPB-8-SS C2036BPB-8-SS C2042BPB-8-SS C2048BPB-8-SS
<ul style="list-style-type: none"> <li>◆ 840± CFM</li> <li>◆ 10" Round Transition</li> </ul>	C2030BPB-K-SS C2036BPB-K-SS C2042BPB-K-SS C2048BPB-K-SS
<ul style="list-style-type: none"> <li>◆ 1065± CFM</li> <li>◆ Two 7" Round Ducts</li> </ul>	C2036BP1-TWB-SS C2042BP1-TWB-SS C2048BP1-TWB-SS C2054BP1-TWB-SS C2060BP1-TWB-SS
<ul style="list-style-type: none"> <li>◆ 1275±</li> <li>◆ Two 8" Round Transitions</li> </ul>	C2036BP1-TWB-8-SS C2042BP1-TWB-8-SS C2048BP1-TWB-8-SS C2054BP1-TWB-8-SS C2060BP1-TWB-8-SS



C2000 Baffle Series

**FEATURES:**

- ◆ Variable Controls
- ◆ Sones: 1.5 to 4.6
- ◆ Filters: Stainless Steel Baffles
- ◆ Front Panel Lighting: LED bulbs Included.  
     30" to 48" Hoods take 2 Bulbs (1 Set)  
     54" to 60" Hoods take 4 Bulbs (2 Sets)
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Heat Controlled Thermostat, Fire Safety Controlled. Activates at 130 degrees.
- ◆ Suggested Distance Codes: 36" above cooking surface.

**OPTIONS:**

- ◆ Transition, see accessories.
- ◆ Remote wiring, see accessories.

NO Performance Warranty over BBQ Grills/Griddles.



**TRANSITION**

Example: C2036PSB-8  
 Vent Size 8" Round x 3-1/2" High

Example: C2042BPB-K  
 Vent Size 10" Round x 7" High



# Ventilator Insert With Baffles, Specifications

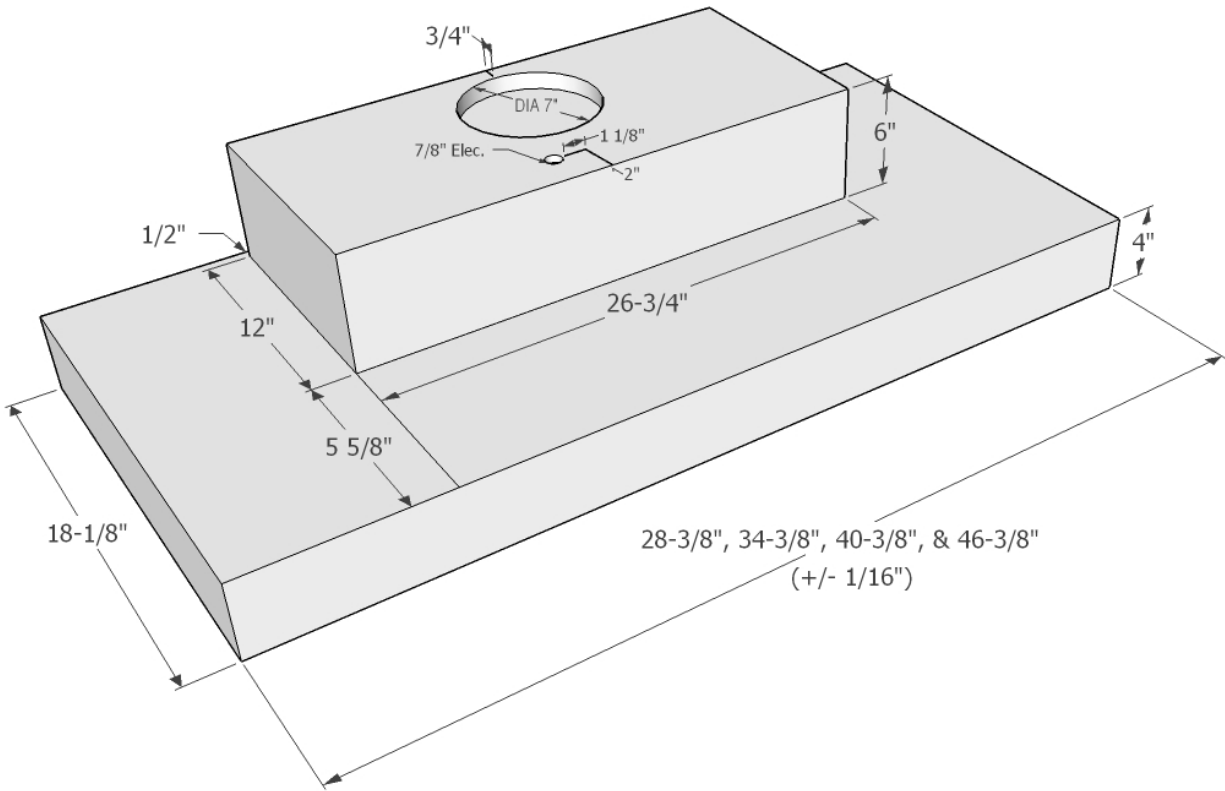

8" Transition  
8" Round x 3-1/2" high



10" Transition  
10" Round x 7-1/2" high

**SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!**

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.