

22-1/8" Depth, 10" High	MODEL
◆ 635± CFM ◆ 7" Round Duct	C2030PSB-SS C2036PSB-SS C2042PSB-SS C2048PSB-SS
◆ 765± CFM ◆ 8" Round Transition	C2030PSB-8-SS C2036PSB-8-SS C2042PSB-8-SS C2048PSB-8-SS
◆ 850± CFM ◆ 10" Round Transition	C2030PSB-K-SS C2036PSB-K-SS C2042PSB-K-SS C2048PSB-K-SS

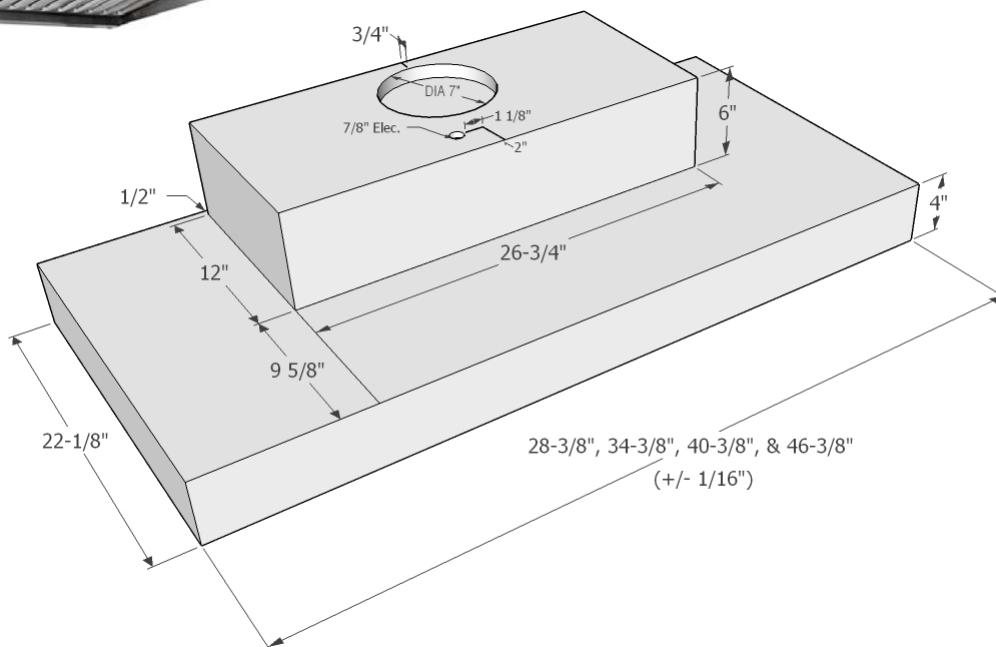
FEATURES:

- ◆ Variable Controls
- ◆ Sones: 1.5 to 4.6
- ◆ Filters: Stainless Steel Baffles
- ◆ Front Panel Lighting: LED bulbs Included.
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Heat Controlled Thermostat, Fire Safety Controlled.
- ◆ Activates at 130 degrees.
- ◆ Suggested Distance Codes: 36" above cooking surface.

OPTIONS:

- ◆ Flange for the perfect fit.
- ◆ Remote wiring.

NO Performance Warranty over BBQ Grills/Griddles.


**TRANSITION**

Example: C2036PSB-8  
Vent Size 8" Round x 3-1/2" High



Example: C2042BPS-K  
Vent Size 10" Round x 7" High



SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.