

22-1/8" Depth, 10" High	MODEL
◆ 1080± CFM ◆ Two 7" Round Ducts	C2036PS1-TWB-SS C2042PS1-TWB-SS C2048PS1-TWB-SS C2054PS1-TWB-SS C2060PS1-TWB-SS
◆ 1290± CFM ◆ Two 8" Round Transitions	C2036PS1-TWB-8-SS C2042PS1-TWB-8-SS C2048PS1-TWB-8-SS C2054PS1-TWB-8-SS C2060PS1-TWB-8-SS


FEATURES:

- ◆ Variable Controls
- ◆ Sones: 1.5 to 4.6
- ◆ Filters: Stainless Steel Baffles
- ◆ Front Panel Lighting: LED bulbs Included.
30" to 48" Hoods take 2 Bulbs (1 Set)
54" to 60" Hoods take 4 Bulbs (2 Sets)
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Heat Controlled Thermostat, Fire Safety Controlled. Activates at 130 degrees.
- ◆ Suggested Distance Codes: 36" above cooking surface.


OPTIONS:

- ◆ Flange for the perfect fit.
- ◆ Remote wiring.

NO Performance Warranty over BBQ Grills/Griddles.

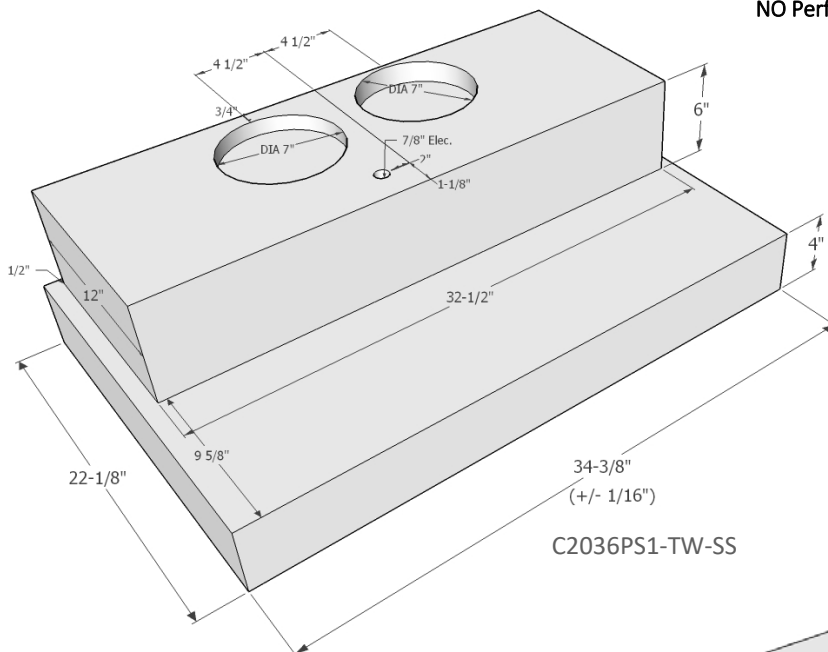

8" Transition
8" Round x 3-1/2" high

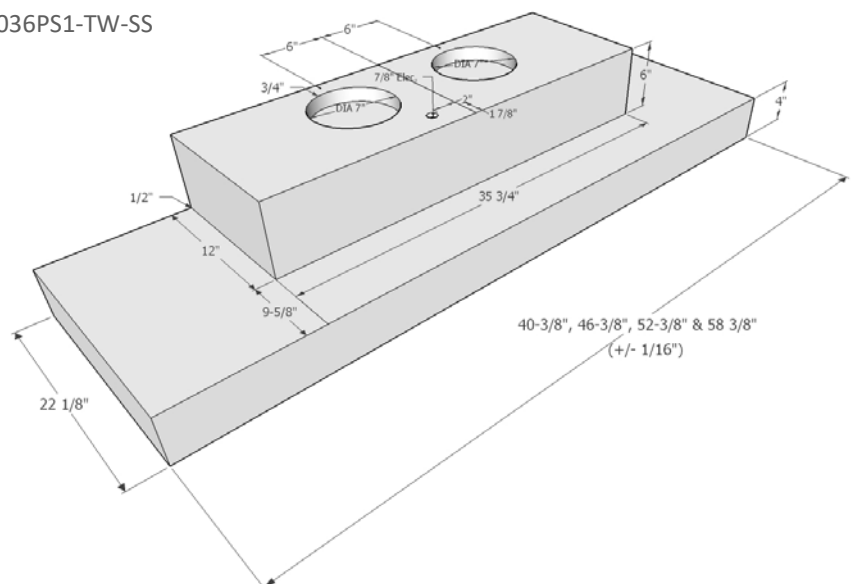

SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.