





Diversitech's Filterhawk Ambient Air Cleaners are designed to collect, dust smoke and other airborne particulates with a 3 stage filtration system consisting of MERV 7 prefilters, MERV 8 Panel filter and MERV 14 primary multi-pocket bag filters. The T configuration of drawing dirty air in through the sides and exhausting clean air out creates a circular airflow pattern in your shop to quickly and efficiently clean and exchange the air. These ambient air cleaners are constructed using powder coated steel. The modular configuration of the Filterhawk allows units to be combined with multiple modules in a double or quad setup to increase the amount filter media. The air cleaners can be easily installed in your facility with an optional wall mounting bracket or eyebolts to hang the units with chains.

### **Features:**

- Powder coated steel
- · Chain hung or wall mounted
- Three-stage filtration system

## **Applications:**

- Welding smoke and fumes
- Wood dust
- Oil mist and smoke from machining
- Dust from grinding

## **Options:**

- · Wall mounting bracket
- Manometer












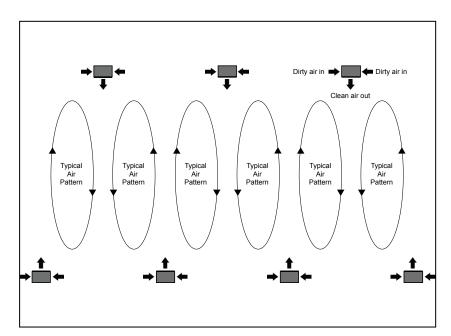

## **How the Filterhawk Ambient Cleaners works**

The Filterhawk ambient air cleaners are typically either setup in a wall mounted configuration along a wall or column, or are chain hung with eyebolts on the trusses of a building. The units are built from a rugged powder coated steel structure. Air cleaners are typically arranged in a staggered layout along the perimeter of the plant to ensure a circular airflow pattern between units. Dirty air is pulled in from both sides of the unit, through a 4" panel prefilter and two MERV 14 bag air filters. The air is then blown out the front exhaust of the unit, moving dirty air over into the next air cleaner through creating a T like airflow pattern.

# **Technical Specifications**

			Pre	Paper	Bag		Input	
	Airflow	Motor	Filter	Pleated	Air		Power	F.L.A
Model	(CFM)	(H.P.)	Type	Filter	Filter	Blower	(v/p/hz)	(amps)
FH-A-3000	3000	1.5	(2) MERV 7	(2) MERV 8	(2) MERV 14	Belt Drive	120v/1/60Hz	15.5
FH-A-4500	4500	3.0	(2) MERV 7	(2) MERV 8	(2) MERV 14	Belt Drive	230/460/575v/3/60Hz	9.6/4.8/3.9

## **Dimensions** \*\*

	Pro	oduct Dimensio	Net Weight	
		(in.)		
Model	Height (in.)	Length (in.)	Depth (in.)	(lbs.)
FH-A-3000	25	72	25	390
FH-A-4500	25	72	25	428

<sup>\*\*</sup> Product dimensions are based on base-models and may vary depending on selected product features. Please contact us for an accurate shipping quote.

### **HEAD OFFICE**

1200 55<sup>th</sup> Avenue Montreal, QC H8T 3J8

### **DISTRIBUTION CENTERS**

CANADA Montreal, QC Toronto, ON UNITED STATES Trenton, NJ Chicago, IL Reno, NV





